



A Division of WSE Engineering Services, Ltd
1765 Restoration Rd SW
Rochester, MN 55902
507-282-8206

The following items are conditions for permit issuance and strict compliance is mandatory.

1. Construction documents and a signed copy of the plan shall be kept at the site of the work, and open to inspection by the building inspector. MSBC1300.0130 subp 6
2. Provide signed rafter certifications including truss layout for trusses to be used displaying conformance with TPI 95 criteria for 35# live load design. Rafter certifications and truss layout shall be on jobsite at time of framing inspection. MSBC1309/R502.11.4
3. Gas lines shall be properly tested and witnessed by the building inspector.
 - Equipment that is not to be included in the test shall be either disconnected from the piping or isolated by blanks, blind flanges, or caps. Flanged joints at which blinds are inserted to blank off other equipment during the test shall not be required to be tested. IFGC 406.3.2
 - Where the piping system is connected to equipment or components designed for operating pressures of less than the test pressure, such equipment or equipment components shall be isolated from the piping system by disconnecting them and capping the outlet(s). IFGC 406.3.3
 - The test pressure to be used shall be no less than one and one-half times the proposed maximum working pressure, but not less than 25 psig (172 kPa gauge), irrespective of design pressure. IFGC 406.4.1
 - Test duration shall be not less than one-half hour. IFGC 406.4.2
4. Windows/doors shall be installed and flashed in accordance with the manufacturer's written installation instructions. Manufacturer's written instructions shall be on jobsite at time of framing inspection. MSBC1309/R609.1
5. All foundation walls shall be inspected prior to backfill for specific code requirements. Foundation Drainage and Foundation Waterproofing MSBC1300.0210 subp 6
6. Provide 7/16" minimum roof sheathing with 24/16 panel index. Use plywood clips on all non-supported joints. MSBC1309/R503.2.1.1(1)
7. The floor shall be blocked perpendicular to the floor joist. Blocking shall be full depth within three joist space of the foundation wall. Floor sheathing shall be fastened to blocking. MSBC1309/R404.1(4)
Spacing Table R404.1(1)
8. Submit engineering data for the floor trusses. Floor truss certifications shall be on jobsite at time of framing inspection. MSBC1309/R502.11.4
9. Provide exhaust fans in all bathrooms. MSBC1309/R303.3

10. A 22" x 30" attic access panel with minimum of 30" headroom over opening is required. MSBC1309/R807.1

Attic access door shall be weather-stripped and insulated to a level equivalent to the insulation on the surrounding surfaces. MSBC1322/R402.2.4
11. Smoke alarms required in all areas leading to sleeping rooms and on all levels, and shall not be installed less than 3 feet from a door to a bathroom containing a bathtub or shower. MSBC1309/R314.3
12. Vault walls shall be balloon framed or have King posts installed in them. (see attached)
13. Approved numbers or addresses shall be provided for all new buildings in such a position as to be plainly visible and legible from the street or road fronting the property. MSBC1309/R319.1
14. **Flashing:** Approved corrosion resistant flashing shall be applied shingle fashion in such a manner as to prevent entry of water into the wall cavity or penetration of water to the building structure framing components. The flashing shall extend to the surface of the exterior wall finish. MSBC1309/R703.4
15. Lots shall be graded to drain surface water away from foundation wall. The grade shall fall a minimum of six inches (6") within the first ten feet (10'). MSBC1309/R703.4
16. Ducts, air handlers and filter boxes shall be sealed. MSBC1322/R403.2.2
17. Window Fall Protection: Window sills in a dwelling unit, where the lowest part of the opening of an operable window is located more than 72" above finished grade or surface below, the lowest part of the window opening shall be a minimum of 24" above the finish floor. MSBC 1309/R312.2.1
18. Floor assemblies constructed of I Joist or trusses shall be protected on the bottom side with one layer of 1/2 inch gypsum board, or 5/8 inch structural panel. MSBC1309/R302.13 (except over crawl spaces not intended for storage or containing heating appliances.)
19. The building or dwelling unit shall be tested and verified as having an air leakage rate not exceeding three (3) air changes per hour in climate zones 3-8. Testing shall be conducted with a blower door at a pressure of two inches (2") w.g. (50 Pascals). Test can be conducted by an independent and approved third party. Test results shall be submitted to the Building Official. MSBC1322/R402.4.1.2

Test results shall be submitted prior to a Certificate of Occupancy being issued.

20. Foundation Wall Waterproofing: The waterproofing shall extend from the top interior wall edge, across the top of the wall, and down the exterior wall face to the top of the footing. MSBC1322/R402.2.2(1)
21. An approved water resistive barrier, free from holes and breaks, shall be applied over studs or sheathing of all exterior walls. MSBC1309/R703.2
22. An approved vapor/soil-gas retarder with joints lapped not less than 12" shall be placed between the concrete floor and the base course/gas permeable layer. The sheeting material shall cover the entire floor area and fit tightly around all penetrations. MSBC1303.2402 subp 2
23. Radon Control: Installation of a passive sub-slab depressurization system, radon control system, to resist radon entry and prepare the building for post construction active radon mitigation is required. MSBC1303.2402
24. Provide rigid wind wash barrier/insulation dam at top plate between rafters per Minnesota Energy Code. MSBC1322/R402.2.3
25. All rim joist areas shall have a sealed air barrier. MSBC1322/Table R402.4.1.1

26. Interior air barrier: The building thermal envelope shall be continuously sealed. Areas of potential air leakage in the thermal envelope shall be caulked, gasketed, weather-stripped or otherwise sealed. This includes all plumbing, mechanical and electrical penetrations. MSBC1322/R402.4.1.1
27. All electrical, plumbing, mechanical, and other penetrations in the interior air barrier shall be sealed. MSBC1322/R402.4.1.1 Table 1322/R402.4.1.1
28. A residential ventilation system shall be installed that is capable of delivering outdoor air to each habitable space by a forced air circulation system, separate duct system, individual inlets, or a passive opening. MSBC1322/R403.5
29. All recessed lighting shall have enclosures that are sealed or gasketed to prevent air leakage to the ceiling cavity or unconditioned space. MSBC1322/R402.4.4
30. Footings to be a minimum of 42" deep for frost. MSBC1303.1600
31. A monometer test on drain, waste and vent piping is required at final inspection. MPC4715.2820
32. Provide a treated bottom plate around the entire perimeter. MSBC1309/R317
33. Roof assemblies subject to wind uplift pressures that exceed 200 lbs. shall have rafter or truss ties provided at bearing locations. This includes the overhang. MSBC1309/R802.11.1
34. Smoke alarms required in all areas leading to sleeping rooms and in each sleeping room. Smoke alarms to be interconnected with building wiring and shall be equipped with a battery backup. MSBC1309/R314.43, R314.4, R314.6
35. Carbon monoxide alarms shall be required in all single family homes and multi-family apartment units. General location requirements: within ten (10) feet of each sleeping room. MN Stat.299F.50 MSBC1309/R315

Where a fuel burning appliance is located within a bedroom or it's attached bathroom, a carbon monoxide alarm shall be installed within the bedroom.

36. Provide 1/2" x 10" anchor bolts at 6' o/c maximum spacing with one bolt within 12" of the end of each piece of sill plate. MSBC1309/R403.1.6
37. REQUIREMENTS FOR ALL STAIRS: MSBC1309/R311.7-R311.7.8.4
 1. 36" minimum width
 2. 10" minimum tread
 3. Use 3 – 2 x 12 stringers
 4. Double joist around openings
 5. 34"-38" high continuous gripable handrail with ends returned to wall.
 6. 7¼" maximum rise
 7. Minimum of 6'8" headroom
 8. Use Joist Hangers

Open risers are permitted, provided that the opening between treads does not permit the passage of a four inch (4") diameter sphere.

The greatest riser height and tread depth within any flight of stairs shall not exceed the smallest by more than 3/8 inch.

Guards on stairs shall not be less than 34" in height measured vertically from the nosing of the treads. MSBC1309/R312.1.2 exception #1

Nothing four and three-eighth inches (4-3/8") or more in diameter shall pass through the guards (on stairways). MSBC1309/R312.1.3

38. Building shall meet 115 mph wind load. MSBC1309 Table R301.2(1)
39. Roof shall meet 35# live load. MSBC1303.1700
40. Safety glazing shall be installed in all tub enclosures where the bottom exposed edge of the glazing is less than 60" measured vertically above any standing or walking surface. MSBC1309/R308.4.5
41. Any glazing closer than 24" to either edge of a door shall be safety glazed. MSBC1309/R308.4
42. All fuel lines shall be of an approved material, properly sized for appliances that are to be served and installed according to the International Mechanical Code or manufacturer's installation specifications. IFGC403/MSBC1346.5403
43. All mechanical equipment shall be installed per manufacturer's listed specifications. Installation manual must be on site for inspection. MSBC1346/304.1
44. All sleeping rooms and basements shall have one window meeting egress standards, or an exterior door.
 - 20" minimum opening in width
 - 24" minimum opening in vertical dimension
 - 5.7 square foot of opening minimum
 - 44" maximum sill height MSBC1309/R310-R310.2.2
45. Where there is usable space both above and below the concealed space of a floor/ceiling assembly, draft stops shall be installed so that the area of the concealed space does not exceed 1,000 square feet. Draft-stopping shall divide the concealed space into approximately equal areas. MSBC1309/R302.12
46. All footings to bear on undisturbed non-organic soil. MSBC1309/R403.1
47. All wood in contact with concrete to be treated wood. MSBC1309/R317.1
48. All glass in doors, atrium doors and sidelights to be Category II safety glass. MSBC1309/R308.4.1
49. Install proper wind bracing. Bracing shall be designed for 115 mph wind load. MSBC1309/R301.2.1
50. Attic ventilation: The total net free ventilation area shall not be less than 1 to 150 of the area of the space ventilated except that the total area is permitted to be reduced to 1 to 300, provided at least 40 percent and not more than 50 percent of the required ventilating area is provided by ventilators located in the upper portion of the space to be ventilated no more than 3 feet below the ridge or highest point, with the balance of required ventilation provided within the bottom third of the attic space. (i.e. eaves) MSBC1309/R806.2
51. A building certificate shall be posted in a permanently visible location inside the building. MSBC1322/R401.3. Certificate shall be posted at final building inspection.
52. Post the attached Inspection Record Card on the jobsite. MSBC1300.0210 subp 3
53. a. The term "complete" shall include all work proposed in the approved permit. All building permits issued shall complete construction of the project within one hundred and eighty (180) days after the permit is issued, without additional approval. If at the time of application, the project is anticipated to not be completed within


one hundred eighty (180) days, the applicant shall provide the project's anticipated timeline. CMS may adjust for reasonableness and approve project timelines as part of the permit review process up to five hundred and forty (540) days. Projects anticipated to exceed five hundred and forty (540) days shall seek approval from the jurisdiction's applicable governing body.

b. A permit holder may request extensions in increments of one hundred and eighty (180) days. CMS may approve up to two extensions if CMS judges steady and continuous progress is being made. Permit holders requesting more than two extensions shall make an application for a new permit. The new permit application shall state the reason and demonstrate that circumstances were beyond the control of the permit holder.

54. This structure must comply with all portions of the Minnesota State Building Code whether noted on this plan or omitted. Failure to note any detail(s) on the plan does not remove the builder from the responsibility of complying with the Building Code. Plan review was done in accordance with the current Minnesota Building Code. Plan review does not waive any additional code compliance issues found on site. MSBC1300

/S/ Jay Kruger
Building Official


VAULTED END WALL DETAIL

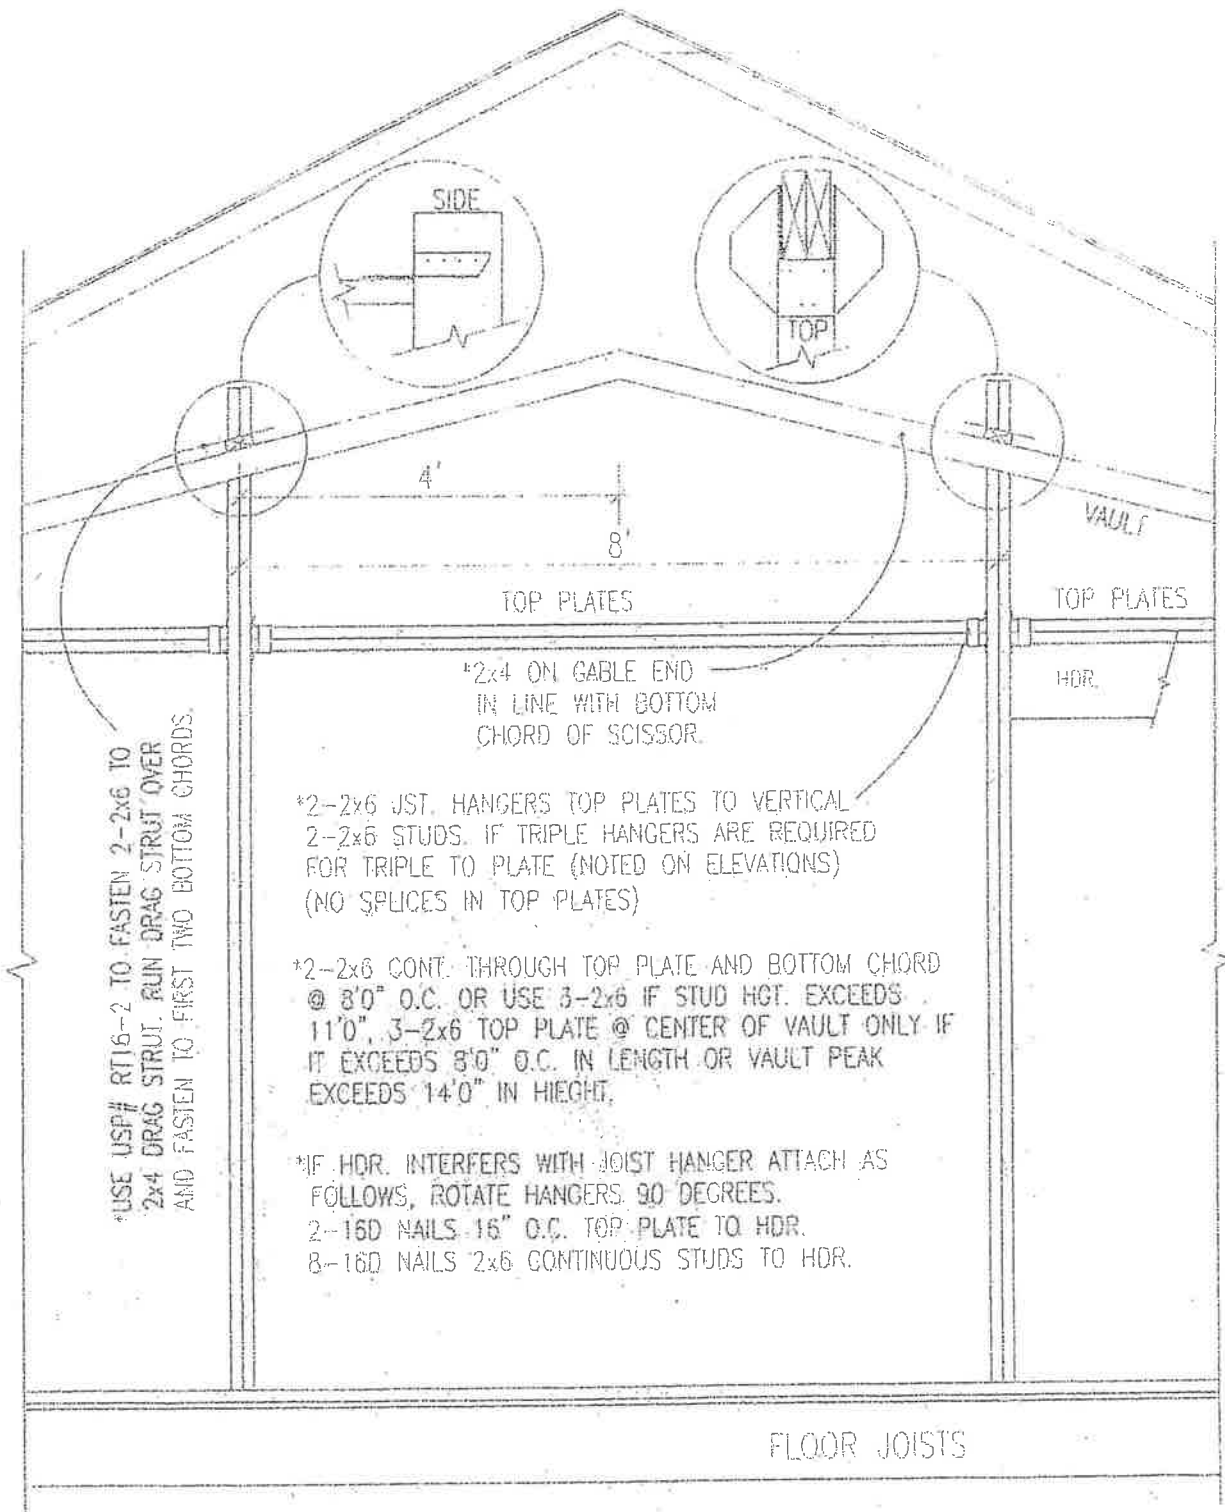


BRACED WALL PANEL

Form TT-077A

Figure 1. Recommended construction details for APA portal frame bracing without hold-downs

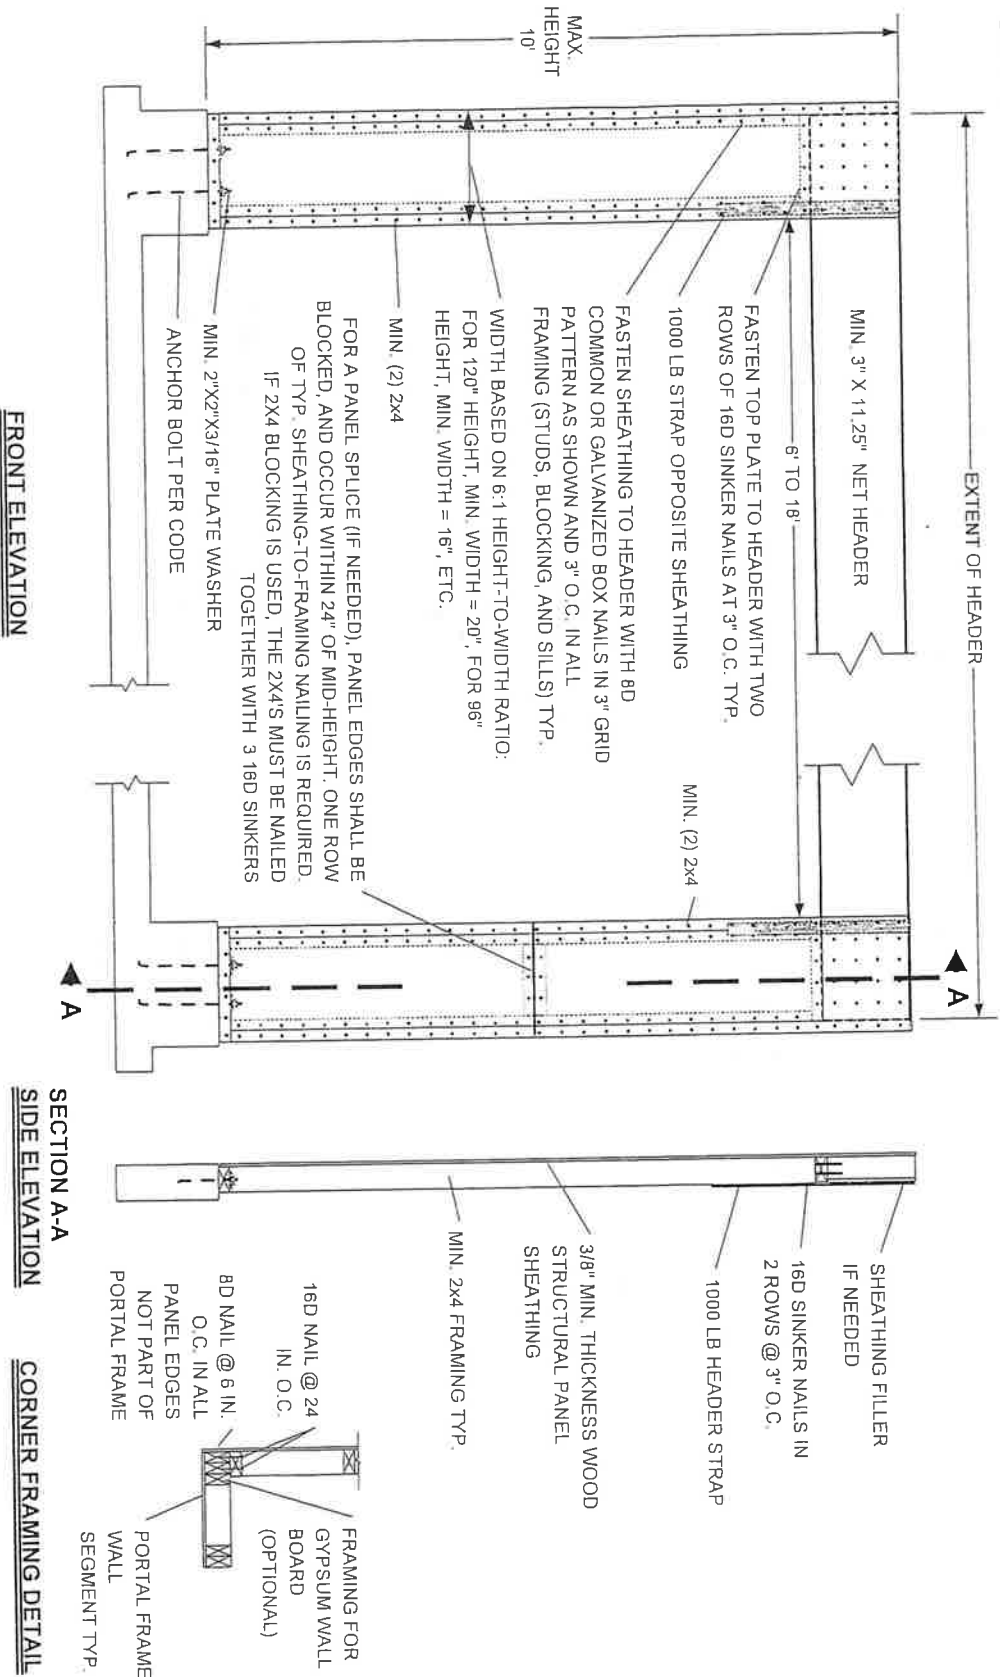

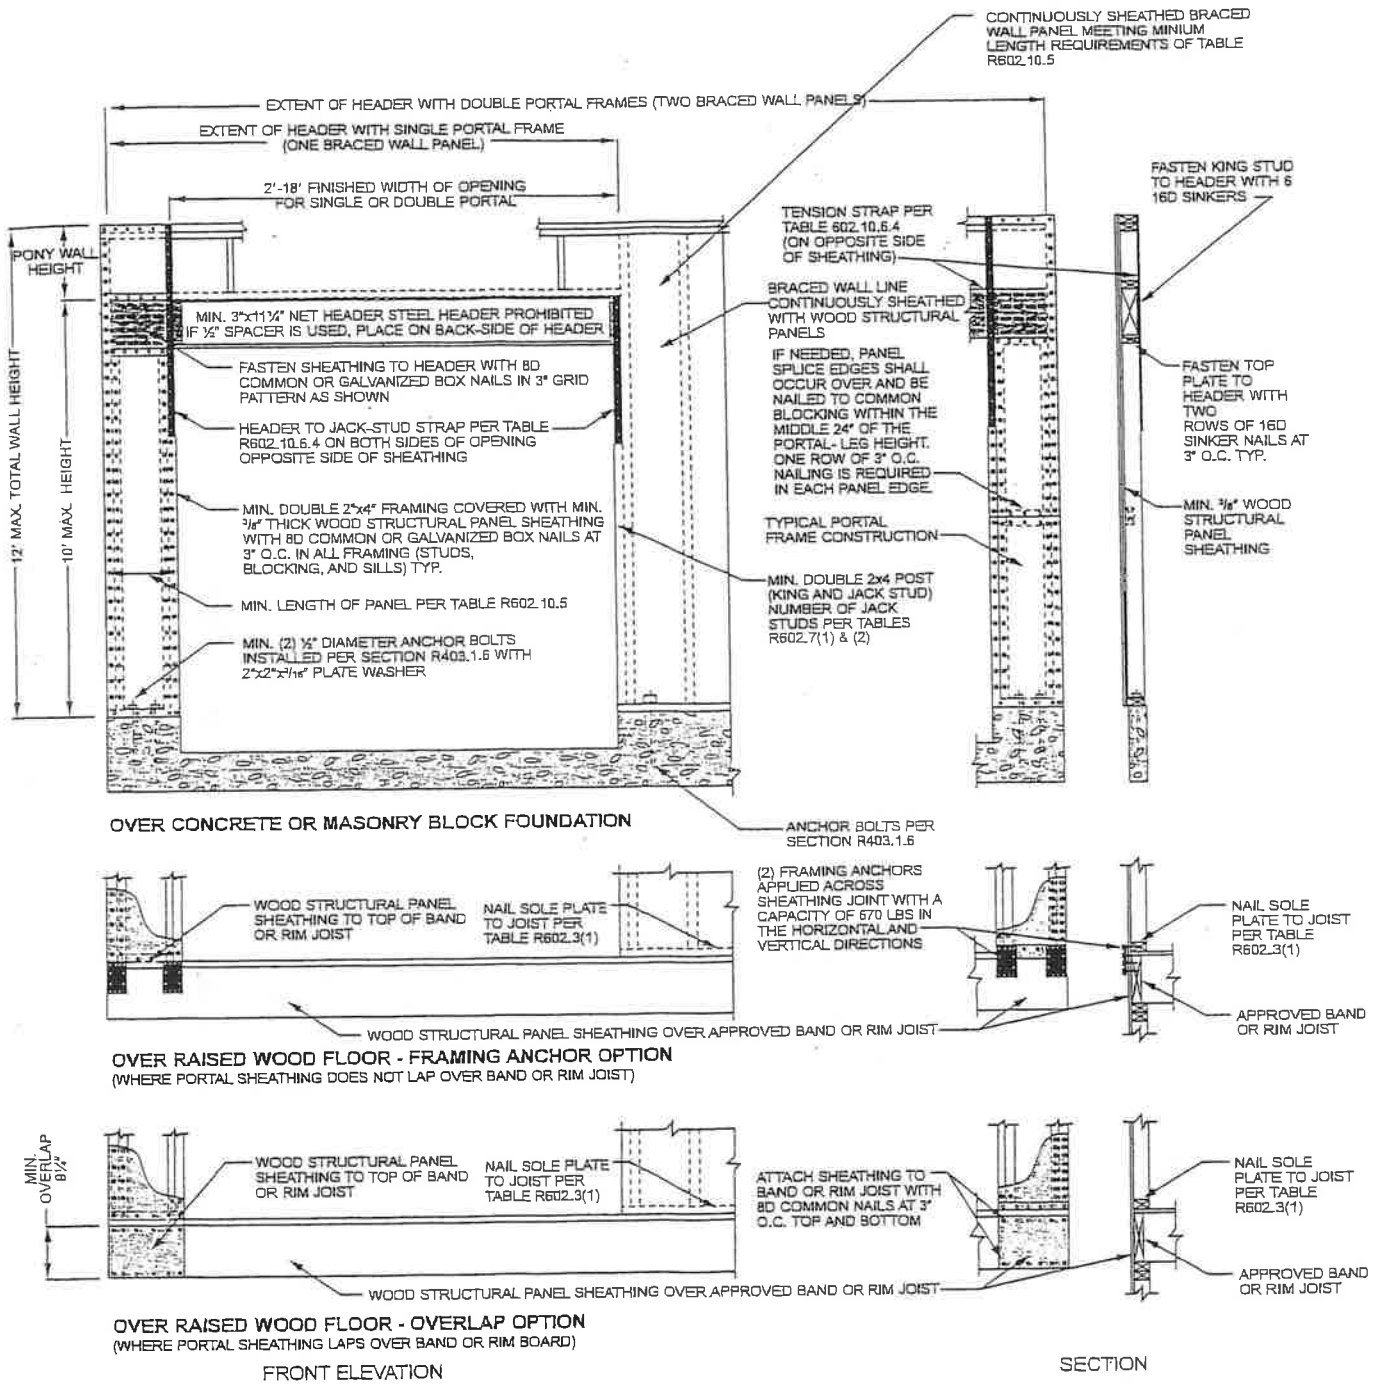

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

FIGURE R602.10.6.4
METHOD CS-PF—CONTINUOUSLY SHEATHED PORTAL FRAME PANEL CONSTRUCTION